





Resins  
UPR & VE  
EMEA

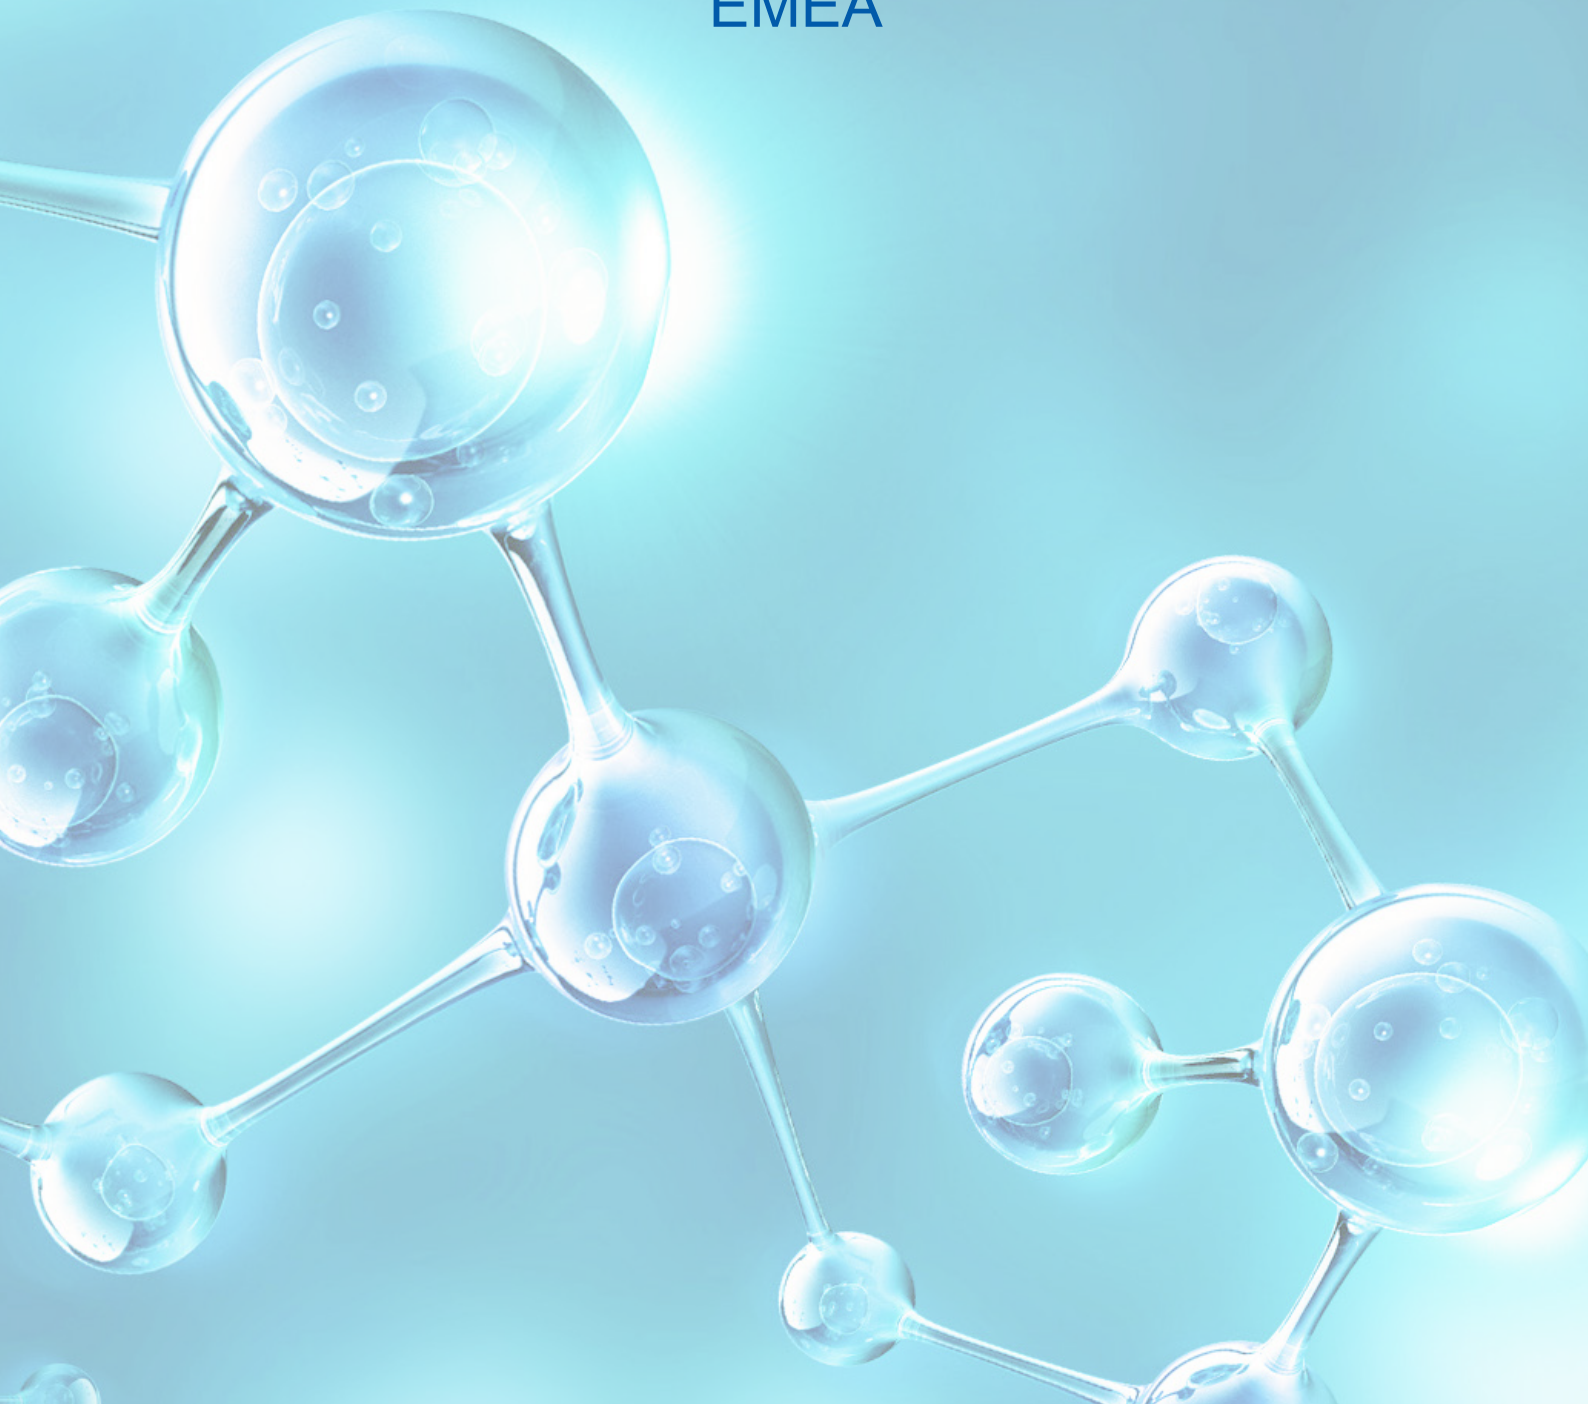

# POLYNT-REICHHOLD GROUP

Global leader  
for thermoset composites

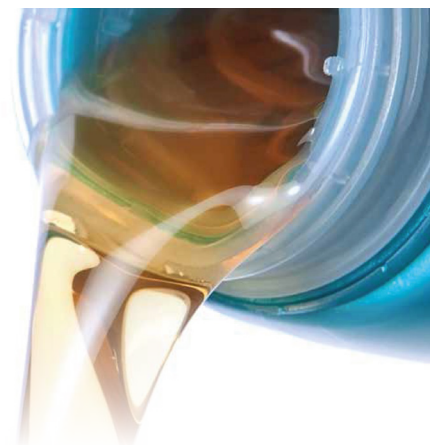

## Contents

1. Production Sites.....	3
2. Polynt Reichhold Group.....	3
3. Polynt Composites.....	4
4. Resins.....	4
5. Unsaturated Polyester Resins.....	5
6. EMEA Specialty Products Portfolio.....	6
7. Vinyl Ester Resins.....	9
8. Company Addresses.....	11

## Production Sites



**Polynt Composites UK Ltd.**

**Polynt Composites France S.A.**

**Polynt Composites Spain, S.L.U.**

**Polynt SpA**

San Giovanni Valdarno; San Polo di Torrile.

**Polynt Composites Poland Sp. z o.o.**

**Reichhold UK Limited**

**Polynt Composites Norway AS**

**Reichhold AS**



# Polynt Reichhold Group

After the merger on May 2017 the new Polynt-Reichhold Group is a global Company in the Intermediates, Coating and Composite Resins, Thermoset Compounds, Gel-coats and niche Specialties.

This combination enhances the Group's leading position as a global vertically integrated specialty chemicals player, with significant global presence in Europe, North America and Asia, a strategy initiated by Polynt with the successful integration of PCCR and CCP in the last years and now further reinforced by Reichhold's global scale, extensive product portfolio and R&D competencies.

Polynt-Reichhold Group is known for its superior quality and impressive range of products and with its excellent distribution network it can provide first-class service to customers whatever their market. Customer Service and Technical Service teams are renowned for their customer focus, offering the best service even after products have left manufacturing.

The Group strives to keep customers satisfied, assisting them in producing premium quality products every time they use its products.

Product innovation is important for the Group's business and it's the reason for which it constantly works with customers to find solutions to problems.

Introducing new or improved products ensures that Polynt-Reichhold Group continue not only to deliver what the market wants and needs, but also when it is wanted and needed.

## What are Resins?

Polynt Group is one of the leading European companies in the production and sale of [Unsaturated Polyester \(UP\)](#) and [Vinyl ester \(VE\)](#) resins.

Due to the continuous innovation of composite materials, filled and reinforced, more specific and better performing products are required.

UP and VE thermosetting resins are available in a wide range of grades (neutral, pre-accelerated, thixotropic, low-styrene content LSC, low-styrene emission LSE, etc.) suitable to meet all the needs of the composite industry and its high diversification.

Polynt Group products find application in major industrial sectors such as:

- [Transportation](#) (automotive, railway, truck, vans, recreational vehicles, sandwich panels for refrigerated lorries, etc)
- [Building & Construction](#) (marble agglomerates and engineered stone, flat and corrugated sheets, pipes, tanks, CIPP (Cured-In-Place-Pipe), profiles, sanitary, polymer concrete, putties, mastics, abrasives...)
- [Electrical & Energy](#) (Windmill blades, nacelles, Electrical components, Insulators...)
- [Marine](#) (yachts, ferries, motor and sail boats, catamarans, canoas...)
- [Sport & Leisure](#) (swimming pools, helmets, surfboards, buttons, sport equipment...).

The portfolio also includes a series of UP resins for 'food contact applications' that fulfil the relevant [EC Regulations](#), including N° 10/2011 on plastic materials and articles intended to come in contact with food (*Plastics Implementing Measure – PIM*).

UP and VE resins have been optimized to be processed using various [application technologies](#) such as hand lay-up, spray-up, casting, pultrusion, filament winding, SMC/BMC, infusion, injection, RTM, etc.

The broad polymer chemistry knowledge of our R&D and Technical Service departments enables us to develop [tailor-made products](#) to meet the specific needs of each individual user.

Whatever your composite needs, we have the resin system and expertise to meet your application requirements.



## Unsaturated Polyester (UP) Resins

Unsaturated polyester resins are thermosetting produced by the reaction of polyesterification between dicarboxylic acids (saturated and unsaturated) and glycols.

The final mixture is obtained by dissolving the resulting resin (a solid polymer at room temperature) in an unsaturated and reactive solvent, styrene and/or in an alternative monomer for Low-styrene/Styrene-free resins.

The crosslinking reaction is obtained by the addition of organic peroxide which acts as an initiator, leading to the formation of a complex three-dimensional network generating a solid irreversible state.

Polynt Group produces several anhydrides (phthalic and maleic anhydride) and dicarboxylic acids (fumaric acid) used for the synthesis of polyester resins: these raw materials along with the strong formulation know-how gained over the years allowed Polynt Group to develop products with the following chemistry and products lines.

### POLYNT COMPOSITES EMEA UP resins' evolution of coding system

Each new UP resin reference developed in Europe will now only be named according to a new code format. For example, a special thixo preaccelerated ORTHO UP resin could now be identified as POLYNT 2500 TA. For existing products, there is no change: the UP resins remain the same and available under their historical names, based on commonly used UP resins product names described below (POLYLITE®, DISTITRON®, NORSODYNE®, ENYDYNE®, ENCORE® PRIME, etc.).

Polynt Group's portfolio includes a wide range of Unsaturated Polyester resins developed for general and more specific application sectors (see the chart).

<i>UP Resins Family</i>	<i>Resins Types</i>	<i>Applications</i>
<b>DISTITRON®</b>	Orthophthalic, Isophthalic, Maleic, DCPD (Dicyclopentadiene), VE	Building & Construction, Transportation, Electrical & Energy, Marine, Sport & Leisure
<b>ENVIROLAM™</b>	Low-Styrene Content (LSC)	Building & Construction, Transportation, Marine, Sport & Leisure
<b>OPTIMOLD®</b>	Tooling system	Building & Construction
<b>ENVIROGUARD®</b>	Bio-based resins	Building & Construction, Transportation, Marine, Sport & Leisure
<b>FIREBLOCK™</b>	Intumescent (Highly Resistant to Fire)	Building & Construction, Transportation
<b>ENCORE® PRIME</b>	Styrene-free	Transportation, CIPP
<b>NORSOLOOK®</b>	Low Profile Additives (LPA)	Transportation, SMC, Pultrusion
<b>NORSODYNE®</b>	Orthophthalic, Isophthalic, Maleic	Building & Construction, Transportation, Electrical & Energy, Marine, Sport & Leisure
<b>ENYDYNE®</b>	DCPD (low-styrene content)	Building & Construction, Transportation, Marine, Sport & Leisure
<b>POLYLITE®</b>	Orthophthalic, Isophthalic, Maleic, DCPD (Dicyclopentadiene)	Building & Construction, Transportation, Electrical & Energy, Marine, Sport & Leisure
<b>ENVIROLITE™</b>	Low Styrene Content (LSC), Bio-based, Recyclable input	Building & Construction, Transportation, Marine, Sport & Leisure
<b>POLYLITE HS TM</b>	Styrene-free, monomer-free	Building & Construction, CIPP, Transportation

For further information please contact us

Product line also includes resins synthesized using special anhydrides: these anhydrides are able to provide technical and application characteristics unique in the world of UP resins, such as the excellent surface curing and high resistance to UV rays. Resins are available in a wide range of versions (neutral, preaccelerated, thixotropic, low-styrene content LSC, low-styrene emission LSE, etc.) to meet all composites industry's needs in case of reinforced or unreinforced applications.

## Sustainable Product Portfolio

As leader in resins production, Polynt Group can offer the best technologies for specific high-performance markets. It is actively engaged with sustainable development and operates internal management systems that prioritize Safety, Quality and Efficiency which encompass a commitment to environmental, social and economic health, the "triple bottom line".

Polynt Group has all the knowledge, resources and capabilities to help customers to develop more sustainable products utilizing the below technologies:

- Lower emission
  - Low styrene content
  - Low styrene emission
  - Styrene-free solutions
  - UV curing
- Cobalt-free
- Use of bio-based raw materials
- Use of recyclable materials
- LCA (Life Cycle Analysis) capabilities
- Through GMP-compliant materials and plants.

Polynt Group trademarks associated with above technologies are: **EVIROLAM™**, **ENCORE™ PRIME**, **POLYLITE HS™**, **ENVIROGUARD™** and **ENVIROLITE™**.

Tailored-made, more sustainable products have been developed for large a variety of market applications (Wind Energy, Marine, Building & Construction, Transportation) and Composite manufacturing processes (Hand Lay Up, Spray up, Infusion, RTM/ Press Molding, Filament Winding, Centrifugal Casting, Pultrusion, Cured In Place Pipe, SMC).

### LOW-STYRENE CONTENT


**EVIROLAM™** is a cost effective solution for lower emissions.

The very low-styrene content (from 15%) of this range provides:

- low-styrene emission (up to 50% reduction) during application and cure
- improved cosmetics
- low-exotherm allowing thicker laminates.

The **EVIROLAM™** product line gives solutions to help manufacturers comply with lower styrene emission limits required in several EMEA countries.

**EVIROLAM™** application: sanitary

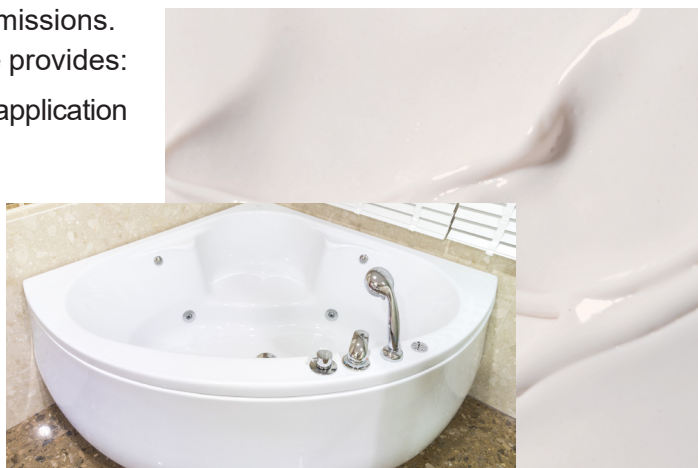

### Life Cycle Assessment (LCA)

Each raw material has its own eco-footprint. By optimizing the composition of the resin the overall environmental footprint (and thus Composites material) can be greatly improved. Life Cycle Assessment (LCA) is a methodology used to measure the environmental impact of a product (or a system) over a life cycle. It measures the environmental impacts from the extraction of raw materials, through processing, manufacture, refurbishment to eventual end of life and disposal.

#### A life-cycle



All products have an impact on the environment. This impact can occur at any time during the manufacture, use of the product or at end of life. These different stages are called collectively a life-cycle.

## Cradle-to-gate LCA

Cradle-to-gate is an assessment of a partial product life cycle from resource extraction (cradle) to the factory gate (i.e., before it is transported to the consumer). Polynt Group actively collaborates with customers to carry-out cradle to end-life LCA assessments.

### Cradle to grave LCA comparison - Standard ortho GRP vs ENVIROLAM™ GRP

A Cradle to Grave LCA concluded that ENVIROLAM™ GRP (Glass-reinforced plastic) reduces by 25% the Greenhouse Gases emissions and by 50% VOC (Volatile Organic Compounds) compared to a standard resin GRP.

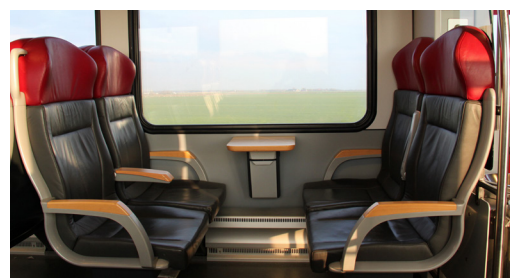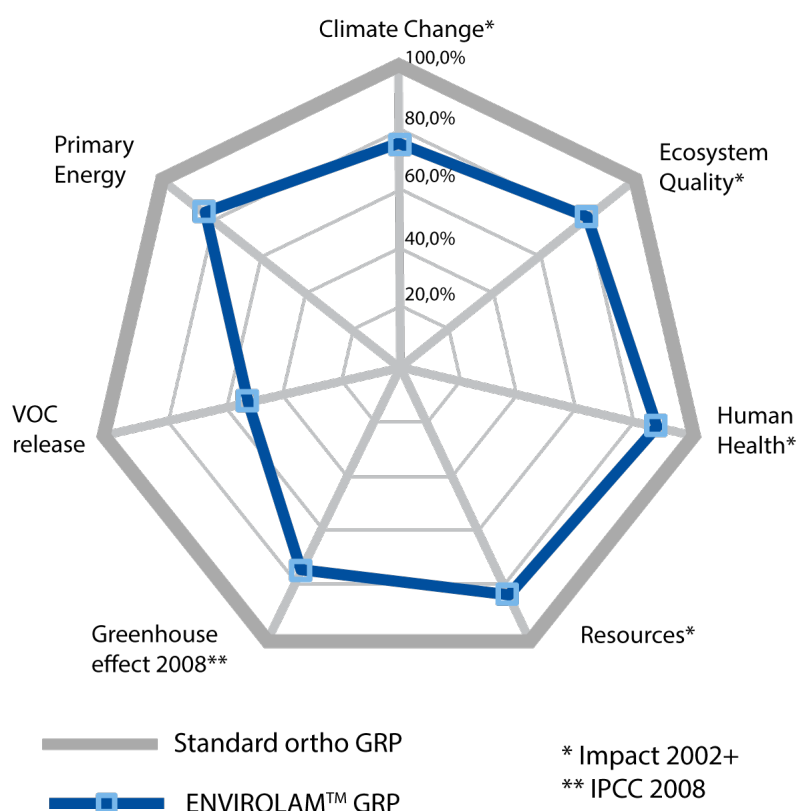

ENVIROLAM™ market: transportation

## STYRENE-FREE

Several styrene-free resins are already utilized in several applications and tailor-made solutions can be developed to meet specific needs.

**ENCORE™ PRIME** is an optimized product line which is also available in thickenable formulations suitable for SMC.

**POLYLITE HS™** is a novel base resin technology. It allows for formulating resins and gelcoats (Norpol Ultimate) which can provide low viscosity resin systems with no/low monomer additions and which are styrene free. The scope of this technology also covers prepreg semi-solid resin systems.

**ENCORE™ PRIME** and **POLYLITE HS™** can be used in several market segments including wind, automotive, industrial, construction and aerospace.

Typical benefits include very low odour/emissions, good weatherability, use of standard peroxide systems and carbon fibre compatibility.



An example of ENCORE™ PRIME market: transportation



## POLYLITE HS

**POLYLITE HS** is a novel base resin technology. It allows for formulating resins and gelcoats (Norpol Ultimate) which can provide low viscosity resin systems with no or low monomer additions and which are styrene free. The scope of this technology also covers prepreg semi solid resin systems.

Market segments for use include wind, automotive, industrial, construction and aerospace where property benefits include:

- room temperature cure and storage
- very low odour / emissions
- fast cure
- carbon fibre compatibility
- good weatherability
- use of standard peroxide systems
- more environmentally friendly SDS.

## BIOBASED RESINS

**ENVIROGUARD™** and **ENVIROLITE™** are the Polynt Group's brands which contain up to 50% of bio-sourced content. These product lines features are:

- similar properties to the conventional UP resins
- similar processability in most composite manufacturing process
- lower carbon foot-print.



Two examples of applications' markets: construction and marine.



## FLAME RETARDANT

Fire protection is a challenging objective where composite materials play an important role.

Fire retardant products are designed to minimize the chance of fire occurring when the end product gets in touch with heat source and to slow down the combustion process, should a fire starts.

The final Fire Retardant performance of a part or a laminate depends on the construction design selected by the end-user who needs to get its own certification.

Polynt Group can provide a full range of products, halogenated or non-halogenated, clear or filled to be used to manufacture laminates meeting the different fire retardant requirements.



Example of FIREBLOCK™ market: railway industry

The most common Polynt group's brands for Fire Retardant resins fall under **FIREBLOCK™** and **DION™ FR** brands.

In addition Polynt Group offers the intumescent system **FIREBLOCK™**.

Intumescent materials work by forming a char layer at the interface between the fire source and the composite laminate, thus cutting off the oxygen accelerant from the organic fuel source.

**FIREBLOCK™** can offer the following benefits:

- halogen-free
- lower toxicity and fumes opacity
- lower density compared to standard fire retardant products
- eco-efficiency: up to 13% CO<sub>2</sub> emission reduction vs. conventional system in railway application
- easy-to-use in all composites processes (mainly Hand lay-up, RTM and Pultrusion)
- compliance with EN 45545-2 at the highest levels (HL3) for railway rolling stock and HL2 level on each side of the laminate.

Polynt Group offers complementary Fire Retardant gelcoat based on intumescence technology under the **POLYCOR™ 2335** and **NORPOL™ SVX** brands.

## TOOLING SYSTEM

The **OPTIMOLD®** and **POLYLITE® Low Profile** tooling Systems solution offers the best solution for **mould construction** providing to user the following benefits:

- Easy to use - low viscosity for hand lay-up or spray-up and infusion applications
- One component - requires only the addition of standard MEKP (Methyl ethyl ketone peroxide) catalyst
- 24-hour turnaround - fast build-up of the mould thickness is an advantage
- Superior dimensional stability - high heat distortion temperature (HDT) allows better rigidity and tool life
- Improved stability - more stable filler suspension and gel time
- Reduced fiber print - low shrink system replicates the master mould surface more accurately
- Use with Polycor and/or Norpool tooling gelcoat - high HDT and chemical resistance makes the gelcoat an ideal choice.



*SWIFT* motor caravan: the front and rear bumpers and roof of caravans and campervans are made of Optimold Tooling (and tooling gel coat).



## LOW PROFILE ADDITIVES

**NORSOLOOK®** and **NORPOL™** low shrink and low profile additives are designed for use in a variety of fiber-reinforced plastic fabrication processes: SMC/BMC, RTM, pultrusion, etc.

Depending on the grade, the main features and benefits of NORSOLOOK® and NORPOL™ additives are:

- Low profile or Class A automotive appearance with outstanding aesthetic properties
- Good to high gloss
- Good mechanical properties and pigmentation
- Good to excellent toughness
- Excellent shrinkage control
- Improved paintability of Class A SMC
- Can be thickened.

An example of UP Resin's application:  
composites' panel for transportation



## Vinyl Ester (VE) resins

Vinyl Ester resins are produced by reaction of an epoxy resin with an unsaturated monocarboxylic acid. The polymer obtained is dissolved in a reactive monomer, such as styrene and/or an alternative monomer, generating a solution that can be applied and cured as conventional polyester resins.

Due to the chemical nature of the family, Vinyl ester resins are able to provide superior performance such as:

- High mechanical properties and high toughness
- High chemical and hydrolysis resistance
- High heat resistance at elevated operating temperatures
- Excellent adhesion to reinforcing fibers.

The range of Vinyl Ester resins is designed to meet the high requirements of various application areas and is based on **DION™**, **DISTITRON®** and **EPOVIA® OPTIMUM** products line, as described in the chart.

This VE resins product line finds its main use in a variety of industrial applications such as absorption towers, process vessels, storage tanks, pipes, hoods, scrubbers, ducts and exhaust stacks and. Polynt Group's VE resins are also widely used by marine, swimming pools and automotive sectors.



Example of DISTITRON® VE 100 application.



<b>VE Resins</b>	<b>VE resins references</b>	<b>Performance &amp; Applications</b>
<b>Bisphenol A Epoxy Vinyl ester resin</b>	DION 9100, DION 9102	Heat, corrosion and chemical resistance
<b>Bisphenol A Epoxy Vinyl ester resin</b>	DISTITRON VE100, EPOVIA KRF 1001, DION 9100, HYDREX 100	Mechanical performance, marine
<b>Bisphenol A Epoxy Vinyl ester resin</b>	DION 9100 PLUS	Mechanical performance, carbon fibre, pultrusion
<b>Higher HDT Bisphenol A Epoxy Vinyl ester resin</b>	DISTITRON VE102, DION IMPACT 9133, DION 9700	Improved thermal resistance
<b>Novolac Epoxy Vinyl ester resin</b>	DION 9400	High temperature performance, corrosion and chemical resistance, pultrusion, carbon fibre
<b>Urethane modified vinyl ester resin</b>	DION 9800	Heat, corrosion and chemical resistance, marine, pultrusion, carbon fiber
<b>Brominated Vinyl ester resin</b>	DION 9300	FR resin, corrosion & chemical resistance, heat
<b>Elastomer modified vinyl ester resin</b>	DION 9500	Flexibility, toughness, marine, carbon fiber, corrosion resistance
<b>Urethane Epoxy Resin based vinyl ester in styrene</b>	EPOVIA® OPTIMUM RF 5000	High performance, thickenable, transportation (SMC/BMC)
<b>Bisphenol A Vinyl ester resin low-styrene content</b>	DISTITRON VEef220, DION IMPACT 9160	Low styrene, high mechanical performance
<b>Infusion grade Bisphenol A Vinyl ester resin</b>	DISTITRON VE370, DION 9102, HYDREX 100 HF	Hydrolysis resistance, marine
<b>Bisphenol-A Epoxy vinyl ester based resin</b>	EPOVIA® OPTIMUM KRF 4031	Hydrolysis resistance, marine
<b>Styrene-free bisphenol A Epoxy Vinyl ester resin</b>	EPOVIA® OPTIMUM EP KRF 1101 TA, DION 9165, DISTITRON 220XZ1, DISTITRON 220XZ1	Styrene-free, CIPP, chemical anchors, mine bolts
<b>Extra clear bisphenol A Epoxy Vinyl ester resin</b>	POLYNT VE220 IQ	Excellent clear color, molding applications requiring good color or transparency

For further information please contact us

The photo on the right shows the 'Soffio 31' RIB (Rigid Inflatable Boat) photo by kind permission of Soffio 31 project.

This powerboat is composed of 3 basic components: deck, hull and engine covers. In order to save weight and increase performance, Polynt Group's specially modified epoxy Vinyl Ester resin PCCR 138-40-40 was used for the hull of the boat. This particular resin gives excellent mechanical properties, adhesion to different fibres and the toughness and fatigue resistance required for race conditions, reducing problems of stress failure of any composite parts.

The Deck was constructed with temperature controlled infusion technology using unidirectional glass fibre and carbon fibre reinforcement, the resin used was Polynt Composites Vinyl Ester, DISTITRON VEef 220V4.

The Engine covers were, again constructed with temperature controlled infusion technology using different layers of carbon fiber fabric for the structure and Polynt Composites special urethane modified Vinyl Ester resin, DISTITRON VE104.

This process (with controlled optimised resin infusion) allows the use of medium high viscosity resin, a resin with less reactive solvent and excellent adhesion to reinforced fibres, less shrinkage during polymerization and enhanced toughness.



## COMPANY ADDRESSES

### EUROPE

#### FRANCE

##### **Polynt Composites France S.A.**

Route D'Arras CS 50019  
62320 Drocourt  
France  
Phone: +33 3 21 74 84 00  
Fax: +33 3 21 49 55 84  
email: contact.FRComposites@polynt.com

#### ITALY

##### **Polynt S.p.A.**

Via del Pruneto, 40  
52027 San Giovanni Valdarno (AR) - Italy  
Phone: +39 055 91 281  
Fax: +39 055 94 3936  
email: contact.IT@polynt.com

##### **Polynt S.p.A.**

Via Romagnoli, 23  
43056 San Polo di Torrile (PR) - Italy  
Phone: +39 0521 812811  
Fax: +39 0521 813445  
email: contact@polynt.com

#### NORWAY

##### **Reichhold AS**

Lilleborggata 4,  
1630 Gamle Fredrikstad - Norway  
Phone: +47 69357000  
Fax: +47 69357001  
email: contact.NO@polynt.com

##### **Polynt Composites Norway AS**

Lilleborggata 4,  
1630 Gamle Fredrikstad - Norway  
Phone: +47 69357000  
Fax: +47 69357001  
email: contact.NO@polynt.com

#### POLAND

##### **Polynt Composites Poland Sp. z o.o.**

ul. Grabska 11d  
32-005 Niepołomice  
Poland  
Phone: +48 12 281 42 00  
Fax: +48 12 281 42 01  
email: contact.PL@polynt.it

#### SPAIN

##### **Polynt Composites Spain, S.L.U.**

Avenida República Argentina, S/N  
09200, Miranda de Ebro – Burgos  
Spain  
Phone: +34 947 027 202  
Fax: +34 947 314 540  
email: contact.ES@polynt.com

#### UK

##### **Polynt Composites UK Ltd.**

Laporte Road  
Stallingborough - Near Grimsby  
North East Lincolnshire DN41 8DR  
United Kingdom  
Phone: +44 1469 552570  
Fax: +44 1469 552597  
email: contact.UKComposites@polynt.com

##### **Reichhold UK Limited**

54 Willow Lane,  
Mitcham  
Surrey CR4 4NA - United Kingdom  
Phone: +44 20 8648 4684  
Fax: +44 20 8640 6432  
United Kingdom  
Phone: +44 1469 552570  
Fax: +44 1469 552597  
email: contact.UKComposites@polynt.com

This brochure is intended to provide a comprehensive list of the products and services available from all business sectors in which are active the companies and/or corporations controlled, directly or indirectly, by Specialty Chemicals International Ltd (hereinafter referred to as «Polynt Group»). The information, recommendations, answers and/or opinions contained herein (which must be intended only for explanatory purposes) are aimed to assist customers on the basis of our technical and scientific knowledge as of today, taking into account that our products are intended for sale to industrial and commercial customers. However we require customers to inspect and test our products before use and to satisfy themselves as to contents and suitability for their applications: nothing herein shall constitute or shall be deemed to be any other warranty or a representation, express or implied, including merchantability or fitness for a particular purpose or results to be obtained from the use of such information, nor shall be taken or construed as infringing of any existing patents. Product names in capital letters are registered trademarks of the relevant member of Polynt Reichhold Group. © Polynt S.p.A. - May 2019



An abstract graphic of a molecular structure composed of translucent blue spheres of varying sizes connected by thin, glowing blue lines. The spheres have internal patterns resembling cell membranes or complex molecules. The background is a soft, light blue gradient.

**Polynt Composites USA Inc.**  
99 East Cottage Avenue  
Carpentersville, IL 60110  
United States  
Phone: +1 800 322 8103  
email: [contact.US@polynt.com](mailto:contact.US@polynt.com)  
[www.polynt.com](http://www.polynt.com)

**Polynt S.p.A.**  
Via Enrico Fermi, 51  
24020 Scanzorosciate (BG)  
Italy  
Phone: +39 035 652 111  
email: [contact.IT@polynt.com](mailto:contact.IT@polynt.com)  
[www.polynt.com](http://www.polynt.com)

